



AVAILABLE ACCESSORIES



Remote Mount Calibration Adaptor



Flow through adaptors

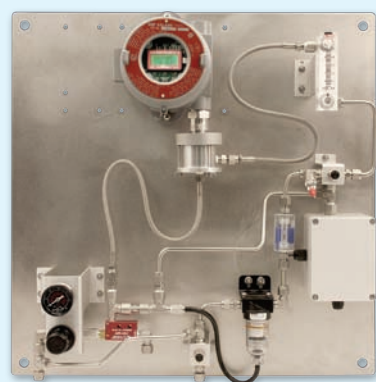

Air aspirator adaptors / panels



Remote horns & lights



Calibration adaptors



Calibration kits


Direct Interface with Beacon 110 / 200 / 410A / 800 Controllers

M2A Wiring Matrix				
	Number of Wires to Controller	Maximum Distance to Controller		
		18 AWG wire	16 AWG wire	14 AWG wire
M2A Transmitter	3	2500 ft.	5,000 ft.	8,000 ft.




Made in the USA

Authorized Distributor:

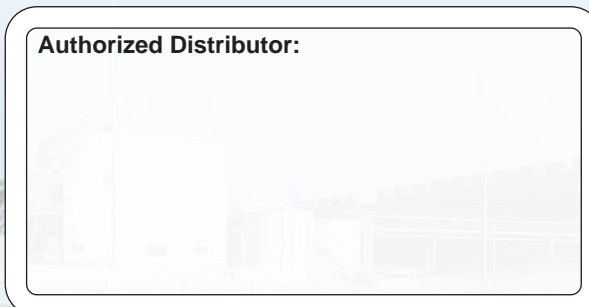

Gas Detection For Life

M2A STAND ALONE TRANSMITTER

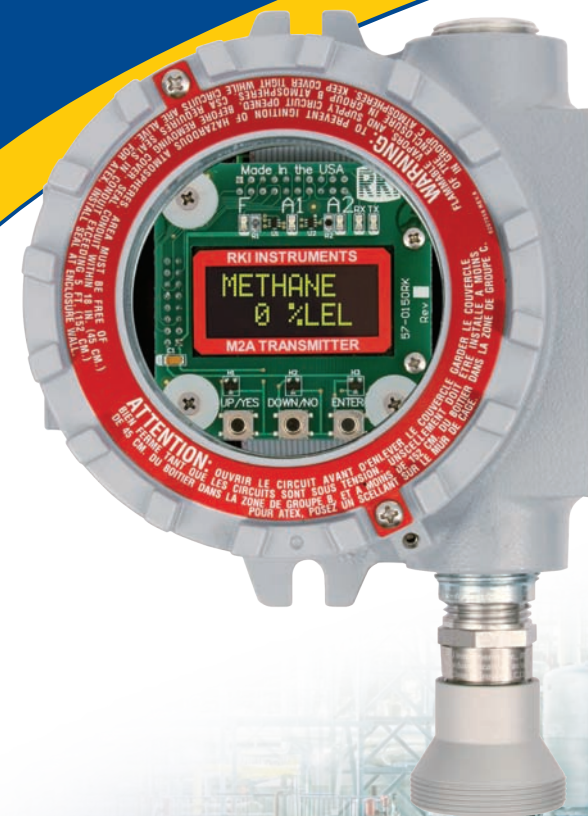

- Operates with or without a controller
- Direct digital readout with OLED cold temperature display
- Available gases include
 - LEL, O2, H2S, CO, CO2, and 100% Vol CH4
 - Toxic gases include NH3, AsH3, Cl2, ClO2, HCN, & SO2
- Infrared sensor for combustibles and CO2
- 4-20 mA & digital Modbus outputs standard
- 2 fully programmable alarm relays & fail relay
- Non-intrusive calibration via magnetic wand
- Explosion proof construction
- Patented water repellent sensor cover
- User friendly setup, push buttons & OLED menus
- Long-life sensors (2 + years typical)

The RKI M2A™ is a state-of-the-art transmitter that can operate as an independent, stand-alone monitor or as part of an integrated system. The M2A connects with an analog or digital signal to virtually any controller, PLC, or DCS. Setup procedures are simplified with user friendly push buttons and OLED menus. It utilizes a magnetic wand technique for performing non-intrusive calibration. The M2A provides an automatic zero drift correction feature, which results in more stable readings and reduces the need for adjustments due to sensor aging.

The housing of the M2A does not need to be opened for zeroing or calibration, making it unnecessary to declassify the area for routine maintenance. It is designed so that a complete field calibration can be performed by one person. Sensor construction is rated Class I, Div. 1 Groups B, C, D for flammables, CO, H2S, O2, and CO2, and Class I, Div. 2 for all other toxics.

The transmitter provides a 4-20 mA output in addition to a Modbus digital output. It also has two levels of alarms with relays, plus a fail alarm with relay. A digital display of the gas concentration, as well as alarm and status lights, can be viewed through the front window.

The toxic sensors are electrochemical type plug-in sensors, which provide high specificity, fast response, and long life. The plug-in design allows quick replacement in the field with no tools required. Toxic sensors are designed for use in Class I, Div. 2 hazardous locations. Sensors available for NH3, AsH3, Cl2, ClO2, HCN, PH3, and SO2

The M2A represents the latest leading edge technology in sensor / transmitters today.

World Leader In Gas Detection & Sensor Technology

RKI Instruments, Inc. | 33248 Central Ave. Union City, CA 94587 | Phone (800) 754-5165 | (510) 441-5656 | Fax (510) 441-5650

www.rkiinstruments.com

Explosion Proof

Non Explosion Proof

Part #	Combustibles		LEL	O2	H2S	CO	CH4	HC	CO2	
	LEL	PPM	H2 Specific	Oxygen	Hydrogen Sulfide	Carbon Monoxide	Methane	Hydrocarbons	Carbon Dioxide	
UL	65-2640RK	65-2647RK	65-2641RK	65-2643RK-05	65-2645RK-05	65-2646RK-05	65-2649RK-CH4 65-2658RK-CH4	65-2649RK-HC	65-2660RK-02 65-2660RK-03 65-2660RK-05 65-2660RK-10	
CSA	65-2640RK-05	65-2647RK-05	65-2641RK-05							
Sensors	Catalytic			Galvanic cell	Electrochemical			Infrared		
Measuring Ranges	0 - 100% LEL	0 - 9000 ppm CH4	0 - 100% LEL	0 - 25.0% Vol.	0 - 100 ppm	0 - 300 ppm	0 - 100% LEL 0 - 100% Vol.	0 - 100% LEL	-02 0 - 5000 ppm -03 0 - 5% Vol. -05 0 - 50% Vol. -10 0 - 100% Vol.	
Resolution	1% LEL	20 ppm	1% LEL	0.1% Vol.	1 ppm		1% LEL / 1% Vol.		20 ppm / 0.01% Vol / 0.1% Vol. / 1% Vol.	
Lower Detectable Limit (LDL)	2% of full scale			0.1% Vol.	2% of full scale					
Max Current Draw (24VDC)	160 mA with alarm 1 and alarm 2 active and all relays energized			125 mA with alarm 1 and alarm 2 active and all relays energized			160 mA with alarm 1 and alarm 2 active and all relays energized			
Response Time (T-90)	35 Seconds or less			90 Seconds or less	60 Seconds or less	90 Seconds or less	30 Seconds or less			
Life Expectancy	2 to 3 years with normal service	3 to 5 years with normal service	2 to 3 years with normal service				5 years plus with normal service			
Accuracy (which ever is greater)	± 5% of reading or ± 2% of full scale		± 0.5% Vol. O2	± 5% of reading or ± 2 ppm H2S	± 5% of reading or ± 5 ppm CO	± 5% of reading or ± 2% of full scale				
Weather Resistant	Patented water repellent sensor coating									
Alarms										
Alarm Settings	Two fully programmable alarm set points, increasing / decreasing, latching / self-resetting, on delays, off delays, normally energized or de-energized.									
Alarm Indication	Visual LEDs. Alarm 1=Amber; Alarm 2=Red; Fail=Red									
Relays	5 amp form 'C' contacts for alarm 1, alarm 2, and fail									
Physical										
Dimensions	Height: 8.5" (215 mm), Width: 5.2" (132 mm), Depth: 4.5" (114 mm)									
Display	Alphanumeric OLED display. 8 characters per line; 2 lines for gas concentration readout, plus user-friendly calibration and setup									
Enclosure	Explosion proof for Class I, Div 1, Groups B, C, D.									
Enclosure Rating	NEMA 4X, explosion proof, watertight, cast aluminum with o-ring seal and epoxy powder coating									
Controls	Magnet used for calibration functions. Calibrates without opening the housing. Internal push-button controls also available for calibration and setup									
Operating Environment										
Operating Temperature	-40°F to 167°F -40°C to 75°C	-4°F to 113°F -20°C to 45°C	-4°F to 113°F -20°C to 45°C	-40°F to 104°F -40°C to 40°C	23°F to 104°F -5°C to 40°C	-40°F to 122°F -40°C to 50°C				
Relative Humidity	5 - 95% RH non-condensing									
Location	Indoor or outdoor. Explosion proof for Class I, Div. 1, Groups B, C, D.									
Operating Voltage	10 VDC - 30 VDC									
Outputs										
Analog	Linear 4-20 mA signal, into 1000 ohms impedance max (24DC), 0 - 500 ohms max (12VDC) corresponding to 0 - full scale									
Digital	Modbus RTU output standard, fully configurable, 2-wire RS-485, 1200 to 19.2k baud									
Approvals	65-2640RK UL	65-2641RK UL	C CSA US				C UL US			
	65-2640RK-05 C CSA US	65-2641RK-05 C CSA US								
Controllers	Beacon 110, Beacon 200, Beacon 410A, Beacon 800 as well as most DCS / PLC systems									
Warranty	One year material and workmanship									

Part#	O2 Oxygen	H2S Hydrogen Sulfide	CO Carbon Monoxide	Toxics See Chart Below	CO2 Carbon Dioxide
65-2666RK *65-2644RK		65-2662RK	65-2663RK	See Chart Below	65-2661RK-02 65-2661RK-03 65-2661RK-05 65-2661RK-10
Sensors	Galvanic cell	Electrochemical			Infrared
Measuring Ranges	0-25% Vol.	0-100 ppm	0-300 ppm	See Chart Below	-02 0 - 5000 ppm -03 0 - 5% Vol. -05 0 - 50% Vol. -10 0 - 100% Vol.
Resolution	0.1% Vol.	1 ppm		See Chart Below	20 ppm / 0.01% Vol. / 0.1% Vol. / 1% Vol.
Lower Detectable Limit (LDL)	0.1% Vol.	2% of full scale			
Response Time (T-90)	35 Seconds or less			60 Seconds or less	30 Seconds or less
Max Current Draw (24VDC)	125 mA with alarm 1 and alarm 2 active and all relays energized				160 mA with alarm 1 and alarm 2 active and all relays energized
Life Expectancy	2 to 3 years with normal service				5 years plus
Accuracy (which ever is greater)	± 0.5% Vol. O2	± 5% of reading or ± 2 ppm H2S	± 5% of reading or ± 5 ppm CO	± 10% of reading or ± 5% of full scale	± 5% of reading or ± 2% of full scale
Alarms					
Alarm Settings	Two fully programmable alarm set points, increasing / decreasing, latching / self-resetting, on delays, off delays, normally energized or de-energized.				
Alarm Indication	Visual LEDs. Alarm 1=Amber; Alarm 2=Red; Fail=Red				
Relays	5 Amp form 'C' contacts for alarm 1, alarm 2, and fail				
Physical					
Dimensions	Height: 8.5" (215 mm), Width: 5.2" (132 mm), Depth: 4.5" (114 mm)				
Display	Alphanumeric OLED display. 8 characters per line; 2 lines for gas concentration readout, plus user-friendly calibration and setup				
Sensor Rating	Non explosion proof construction, designed for Class I, Div. 2, Groups B, C, D (no certification)				
Housing J-Box	NEMA 4X, explosion proof, watertight, cast aluminum with o-ring seal and epoxy powder coating				
Controls	Magnet used for calibration functions. Calibrates without opening the housing. Internal push-button controls also available for calibration and setup				
Sensor	Aluminum / Plastic (non explosion proof)				
Operating Environment					
Operating Temperature	-4°F to 113°F -20°C to 45°C	-40°F to 104°F -40°C to 40°C	23°F to 104°F -5°C to 40°C	14°F to 104°F -10°C to 40°C	-40°F to 122°F -40°C to 50°C
Relative Humidity	5 - 95% RH non-condensing				
Location	Indoor or outdoor				
Operating Voltage					
10 VDC - 30 VDC					
Outputs					
Analog	Linear 4-20 mA signal, into 1000 ohms impedance max (24DC), 0 - 500 ohms max (12VDC) corresponding to 0 - full scale				
Digital	Modbus RTU output standard, fully configurable, 2-wire RS-485, 1200 to 19.2k baud				
Controllers					
Beacon 110, Beacon 200, Beacon 410A, Beacon 800 as well as most DCS / PLC systems					
Warranty					
One year materials and workmanship					

*Partial pressure sensor for helium (He) applications. Consult factory for details.



M2A Toxic Transmitter Sensor Ordering Information				
Part Number With J-Box	Gas	Range	Resolution	Sensor Type
65-2648RK-NH3	Ammonia (NH3)	0 - 75.0 ppm	0.1 ppm	ESM -01
65-2648RK-AsH3	Arsine (AsH3)	0 - 1.50 ppm	0.1 ppm	ESM -01
65-2670RK-CL2	Chlorine (Cl2)	0 - 3.00 ppm	0.01 ppm	CT-7
65-2670RK-CL210	Chlorine (Cl2)	0 - 10.0 ppm	0.1 ppm	CT-7
65-2670RK-CLO2	Chlorine Dioxide (ClO2)	0 - 1.00 ppm	0.01 ppm	CT-7
65-2648RK-HCN	Hydrogen Cyanide (HCN)	0 - 15.0 ppm	0.1 ppm	ESM -01
65-2648RK-PH3	Phosphine (PH3)	0 - 1.00 ppm	0.01 ppm	ESM -01
65-2648RK-SO2	Sulfur Dioxide (SO2)	0 - 6.00 ppm	0.01 ppm	ESM -01